


APEXA® TL-1500

Tiger Lake Compact POS


APEXA® TL-1500 is a premium all-in-one POS terminal powered by Intel's 11th Gen. Tiger Lake.

The compact monitor screen allows users to make practical use of limited space.

It can create a sophisticated interior design in a modern and contemporary style, and is optimized for large-scale distribution, dining, specialty stores, and franchise industries.

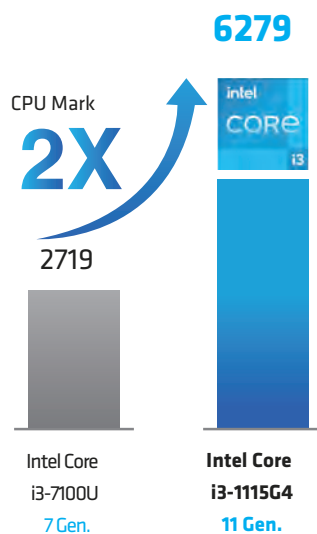

APEXA® TL-1500_Features & Benefits

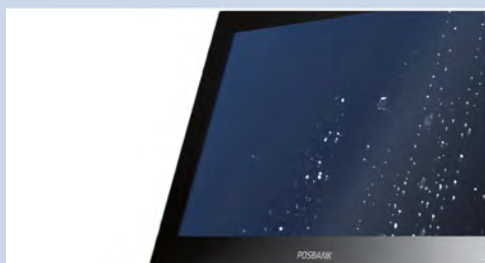

The latest Intel 11th Gen. Tiger lake

- Higher-performance computing and graphics
- POS systems for retail and QSR

Fast installation and maintenance

- Spacious I/O ports placed on top for easy access
- Reduced maintenance costs

Liquid ingress protection design

- Prevents the ingress of various liquids and protection design foreign substances
- More suitable for food and beverage service environments

APEXA® TL-1500_Specifications

System	Processors	Intel® Core™ i3-1115G4 Processor 6M Cache, up to 4.10 GHz
	Chipset	Intel® Tiger Lake
	Memory	4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM (Max. 32GB)
	Storage	SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI
	RAID	RAID 0,1
	Operating Systems	Windows 10, Windows 10 IOT, Windows 11
	Audio	HD Audio Codec
Display	Type	15" TFT LCD, LED Backlight
	Resolution	1024 x 768
	Brightness	300 cd/m² (typ.)
	Touchscreen	Projected Capacitive Touch
Interface	Display	VGA x 1 (With Power Output)
	USB	6 (Rear 2, Back 4, USB 3.0 x 2, USB 2.0 x 2) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45
	Serial	6 (COM1 with 5V/12V Power Output on 9 Pins, BIOS) (COM2~3 RJ-45, Full Signal) (COM4 RJ-11, Only TX/RX, 12V Power Output, Reserved for CDP) (COM5, Full Signal) (COM6 RJ-45, Only TX/RX, 5V Power Output, Reserved for MSR)
	Back I/O	Cash Drawer Port(GPIO Communication) (RJ-11 6 Pins) x 1 + USB 2.0 x 2 (Default)
	Optinal I/O	Gigabit Ethernet x 1 (RJ-45) + USB 2.0 x 2 (Factory option) 12V Powered USB 2.0 x 1 + 24V Powered USB 2.0 x 1 (Factory option) 12V Powered USB 2.0 x 1 + 12V Powered USB 2.0 x 1 (Factory option) 24V Powered USB 2.0 x 1 + 24V Powered USB 2.0 x 1 (Factory option) 12V Powered USB 2.0 x 1 + USB 2.0 x 1 (Factory option) 24V Powered USB 2.0 x 1 + USB 2.0 x 1 (Factory option) COM5 x 1 (RJ-45, Full signal) + USB 2.0 x 2 (Factory option) USB A 2.0 x 4 (Factory option) One option attachable at a time
	LAN	Gigabit Ethernet x 1 (RJ-45)
	Audio	Line-out x 1
	Power DC-IN	3 Pin DIN Jack
	Extension Slot	M.2 for WiFi/BT, SSD
	Power Supply	Adapter 24V, 2.5A (Nomarl) / 24V, 6.35A(Powered USB Option)
	Operating Temperature	0°C ~ 60°C at 10% to 90% Humidity
Physical & Environmental	Storage Temperature	-20°C ~ 80°C at 10% to 90% Humidity
	Dimensions (W x H x D)	364 x 333 x 210 (mm), 14.3 x 13.1 x 8.2(in)
	Packing Dimensions (W x H x D)	500 x 470 x 300 (mm), 19.6 x 18.5 x 11.8(in)
	Net Weight	5,300g, 11.68 lbs
	Packing Weight	8,000g, 17.63 lbs
	Color	Dark Grey, High Gloss White
	2nd Displays	9.7", 15" LCD Display, 1024 x 768, Optional Touchscreen
Options & Peripherals	Customer Display	VFD, 20 Columns x 2 Lines
	Storage	2.5 inch SSD 128GB, HDD 500GB, 1TB
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
	Smart Card Reader	EMV Level 1
	Dallas	Dallas i-button Reader
	Fingerprint	Yes
	Wall Mount Kit	VESA-Compatible, 75 x 75(mm), 100 x 100(mm)
	Serial Conversion Cable	RJ-45 to D-sub 9
	Speaker	2 x 1W (Stereo) (Factory Option)
	WiFi/BT	M.2 for WiFi/BT
	TPM	Support

EC Electronics, Limited
(852) 3590 6397
POSBANK® (852) 3590 6497

www.ecline.com.hk sales@ecline.com.hk
Unit A, 2/F, Mai Tak Industrial Building,
No. 221 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

POSBANK and the POSBANK logo are trademarks of POSBANK in the United States and other countries. All trademarks are the property of their respective owners. Intel, Celeron, Core are registered trademarks of Intel Corporation in the United States and other countries. Microsoft, Windows 7, Windows 8.1, Windows 10 IoT Enterprise and POS Ready 7 are registered trademarks of Microsoft Corporation in the United States and other countries. POSBANK shall not be liable for technical or editorial errors or omission contained herein. The information in this publication is informational purposes only and may be altered or amended by POSBANK. All statements regarding POSBANK's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.